


DULOK™

DOUBLE WIRE PANEL SYSTEM

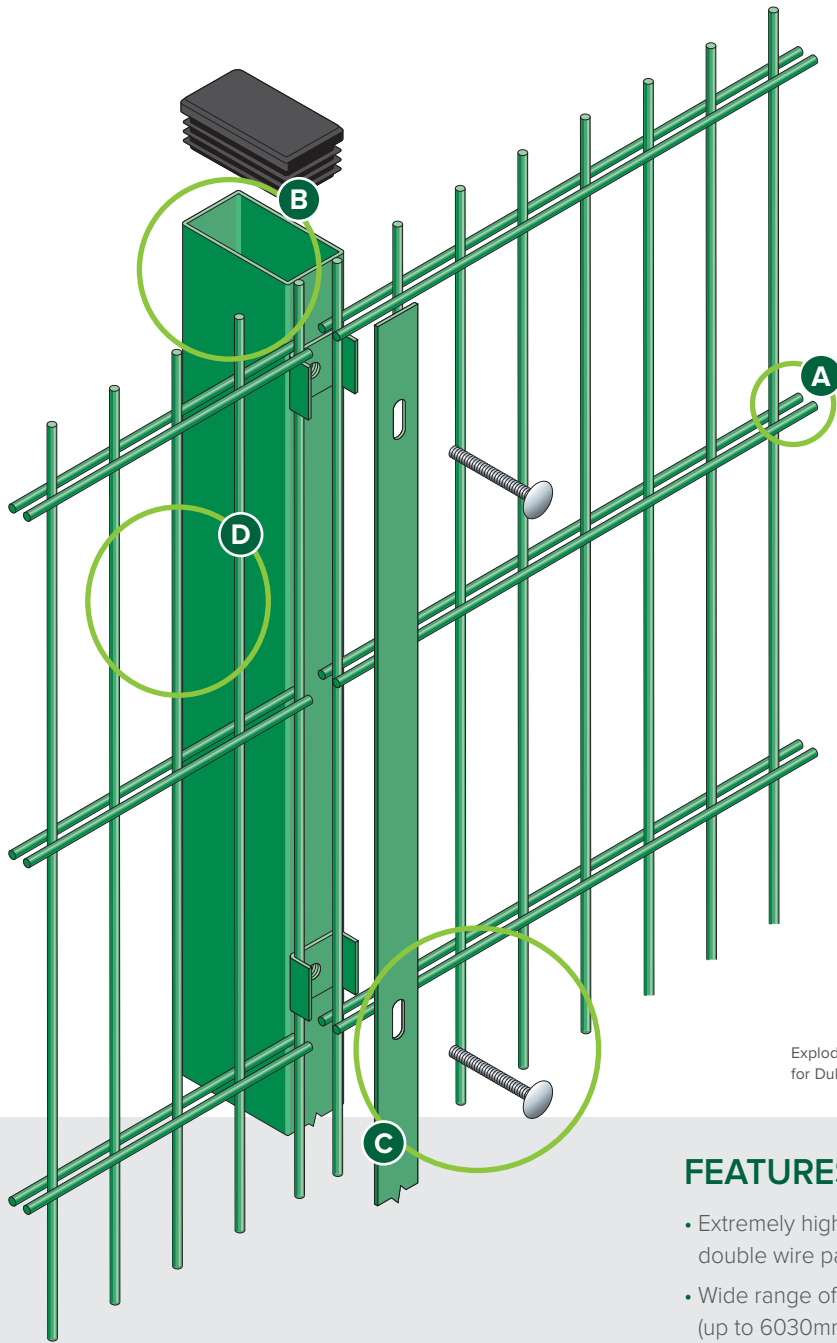

- A** Twin 8mm wire either side of a 6mm vertical wire
- B** Galvanised and polyester powder coated panels and posts
- C** Pin hex security screw
- D** No visible fixings on reverse of post

Conforms to **BS1722: Part 14**



Sheardrive™ option

Exploded view of post and clamp for Dulok panel system


FEATURES

- Extremely high, anti-cut-through, double wire panels
- Wide range of height options (up to 6030mm high)
- RAL colours available

SUITABLE FOR


- Public buildings
- Schools
- Industrial buildings
- Multi-use games areas

SYSTEM DETAILS




Sheardrive™ high security option before shearing


Sheardrive™ high security option after shearing




Plan of end post



Plan of panels in line



Plan of internal corner



Plan of external corner



DESCRIPTION

Preventing people from cutting through or climbing over your fencing system is essential for schools, sports grounds and many other public places. Using a double wire manufacturing process, the Dulok™ rigid mesh panel fencing system offers protection against both of these factors.

Each steel panel features twin 8mm wires welded either side of 6mm vertical wires, giving would-be intruders little chance of breaking through. Panels are fixed to steel posts using sturdy clamps and secured with pin hex security screws, with no visible fixings on the back of posts.

Available in a wide variety of RAL colours and over 20 different heights, Dulok™ double wire mesh fencing can be tailored for every installation. The system conforms to BS 1722-14 for open mesh steel panel fences as standard.

FINISH

Our welded steel wire mesh perimeter security fencing panels are hot dip galvanised only or galvanised and polyester powdercoated. The standard colour is Green RAL 6005. RAL range of colours available.

PANEL DIMENSIONS

| | |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Heights | 630, 830, 1030, 1230, 1430, 1630, 1830, 2030, 2430, 2660, 2860, 3030, 3460, 3660, 3860, 4060, 4460, 4860, 5060, 5460, 5660, 6060mm |
| Panel width | 2506mm |
| Mesh size | 200 x 50mm |
| Wire diameter | 6mm (verticals) and 2 x 8mm (horizontal) (also available in 6/5/6mm) |
| Top edge projection | 30mm [†] |

Notes: Fence heights above 3030 mm are made up of 2 or more panels.

[†] can be inverted to give flush edge.

All dimensions are nominal

DULOK POSTS AND CLAMPS

For the Dulok Double Wire panel system CLD has developed a post and clamp bar system which provides a simple method of securing. Complete with an anti-vandal fastener, installed with either a battery-powered driver or traditional tools, this system offers a rapid and secure installation.



SLOPING GROUND

Panels can be stepped as required within the clamp bar system.

Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

VARIATIONS

The posts are available in a range of lengths to accommodate panel heights and ground conditions. In addition, many variations are available:

- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels



DIMENSIONS

| | |
|------------------------|-----------------------------------------------------------|
| Posts | 60 x 40mm RHS to 120 x 60mm RHS dependant on height |
| Flat clamp bars | 40 x 5mm |
| Post centres | 2520mm |